




- 12" FASCIA







4" WALL SECTION





3,000 PSI MIN. CONCRETE

12GA. GALV. 4-WAY


STEEL PLATE FLOOR

FIELD DRILLED ANCHOR BOLT DETAIL NO SCALE

THIS DRAWING IS FOR REFERENCE PURPOSES ONLY. PAR-KUT BUILDINGS MUST BE SECURELY ANCHORED IN PLACE AND ELECTRICAL SYSTEM MUST BE PROPERLY GROUNDED. ADEQUATE SIZED ANCHOR BOLTS SHALL BE USED. THE SIZE AND DEPTH OF THE ANCHORS SHOULD BE OF SUFFICIENT DESIGN TO WITHSTAND THE HIGHEST RECORDED WIND SPEEDS/SEISMIC DESIGN CATEGORY IN THE AREA OF INSTALLATION. CONSULT A PROFESSIONAL ENGINEER FAMILIAR WITH THE WEATHER CONDITIONS IN THE AREA

OVERALL SHIPPING DIMENSIONS: 8'6W X 10'6L X 8'4H

ESTIMATED WEIGHT: 4,000 LBS

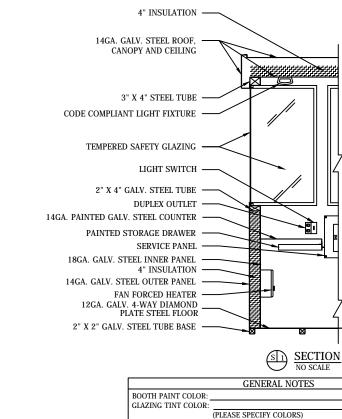



OTE: THIS PRINT AND DESIGN ARE THE PROPERTY OF PAR-KUT NTERNATIONAL, INC. IT MUST NOT BE REPRODUCED IN ANY ANNER, NOR SHALL IT BE SUBMITTED TO OUTSIDE PARTIES FOR AMINATION WITHOUT OUR CONSENT. IT SHALL BE USED ONLY S A MEANS OF REFERENCE TO WORK DESIGNED AND FURNISHEE Y PAR-KUT. PAR-KUT RESERVES THE RIGHT TO MAKE CHANGES O DESIGN FOR ENGINEERING PURPOSES WITHOUT NOTICE. VISIONS MAY NOT BE NOTED

PAR-KLIT INTERNATIONAL, INC 4096 | Production Driv Harrison Twp, Mich 48045-1351 PH. (586) 468-2947

www.parkut.com

SHEET WG# PK108p A-1 STANDARD 8' X 10' PARVUE BOOTH

NTS DPH 7-27-2017 SIZE SALES REPRESENTATIVE

MODEL 108P



- 3" X 3" X 3%" (MIN) STEEL ANCHOR CLIP WITH A 1" ANCHOR BOLT HOLE, 4-REQ'D. ONE EACH CORNER. ANCHOR BUILDING AFTER FINAL LOCATION. ANCHOR BOLTS
- OUTER EDGE OF BUILDING.
- SUGGESTED MINIMUM FOUNDATION/SLAB.

GENERAL SITE INSTALLED ITEMS PROVIDED BY OTHERS

- PROVIDE 120V/240V, SINGLE PHASE, 3-WIRE SERVICE WITH GROUND
- CONCRETE FOUNDATION/SLAB MINIMUM 6" DEEP, 3,000 PSI MINIMUM (28 DAY ACI 318). THE FOUNDATION/SLAB SHOULD BE A MINIMUM OF 24" WIDER THAN THE BUILDING FOOT PRINT DIMENSIONS. THIS IS TO PROVIDE A 12" CONCRETE BORDER ON EACH SIDE OF THE BUILDING.
- 3. ADEQUATE SIZE DRILLED ANCHOR BOLTS. SUGGESTED SIZE: $\frac{3}{4}$ " X $4\frac{3}{4}$ " POWER FASTENERS "POWER STUD" CATALOG #7441SD1
- COUNTER- 22" DEEP PAINTED GALVANIZED STEEL MOUNTED 32" ABOVE FLOOR.
- PAINTED STORAGE DRAWER BENEATH COUNTER.
- DOOR- 36" WIDE SLIDING STEEL WITH WEATHER-STRIPPING, BALL BEARING HANGERS, HEAVY DUTY TRACK, SAFETY GLAZING, AND HARDWARE.
- 2" DIAMETER HOLE FOR DROP CORDS.
- DUPLEX OUTLET MOUNTED ABOVE COUNTER.
- INTERIOR LIGHT CODE COMPLIANT LIGHT FIXTURE.
- SWITCH FOR INTERIOR LIGHT.
- HEATER- WALL MOUNTED WITH INTEGRAL THERMOSTAT CONTROL
- CIRCUIT BREAKER PANEL- 12 SPACE, 120/240V, 1 Ø-3 WIRE WITH GROUND. 100 AMP MAIN BREAKER INCLUDED. ALL BRANCH BREAKERS FOR FACTORY INSTALLED

NOTE: PAR-KUT BOOTHS ARE OF SINGLE UNIT WELDED STEEL CONSTRUCTION, FACTORY ASSEMBLED AND DELIVERED SET UP. FAILURE TO SECURELY ANCHOR BOOTH MAY RESULT IN OVERTURNING OF UNIT AND SERIOUS INJURY TO

- A. GLAZING TEMPERED SAFETY GLAZING SET IN PAINTED STEEL EXTERIOR WINDOW STOPS WITH REMOVABLE ALUMINUM INTERIOR STOPS.
- PAINT- FINISH SHALL BE SINGLE COLOR OF CHOICE, IMRON POLYURETHANE HIGH GLOSS INDUSTRIAL COATING. SHALL BE APPLIED TO ALL EXPOSED METAL SURFACES. THIS EXCLUDES FLOOR, ROOF SURFACE, AND ANY STAINLESS STEEL COMPONENTS (IF USED).
- C. ELECTRICAL- ALL WIRING BY PAR-KUT TO BE #12(MIN) STRANDED COPPER, THHN ENCLOSED IN ½" (MIN) E.M.T. PER NATIONAL ELECTRIC CODE. ALL ELECTRICAL EQUIPMENT WILL BE LISTED BY U.L. OR EQUIVALENT RECOGNIZED NATIONAL TESTING LABORATORY. ALL WIRING TO TERMINATE AT C.B. PANEL. ALL CIRCUITS HAVE GREEN GROUND WIRE.
- BOOTH WILL HAVE A 3" CANOPY OVERHANG ON ALL SIDES.
- LIFTING RING(S) ARE PROVIDED ON ROOF.
- NO ON SITE WORK BY PAR-KUT.
- ACTUAL LOCATION OF ELECTRICAL DEVICES MAY VARY DUE TO INSTALLATION CONSTRAINTS, SHIPPING RESTRICTIONS, OR FOR PROPER PLACEMENT TO SATISFY APPLICABLE CODES.

