


SERVICE ENTRANCE/ANCHOR BOLT LAYOUT



6" FASCIA 2" GRADE TO FLOOR -

4" WALL SECTION · 2" X 2" GALV. STEEL TUBE BASE MEMBER CONTINUOUS WELD 4 SIDES STAINLESS STEEL 5/8" POWER FASTENERS "POWER-STUD" ANCHOR BOLT 4¹/₂" LENGTH CAT. NO. 7332 2" X 2" X 2" X ¼" ANGLE IRON ANCHOR CLIP, ONE EACH CORNER

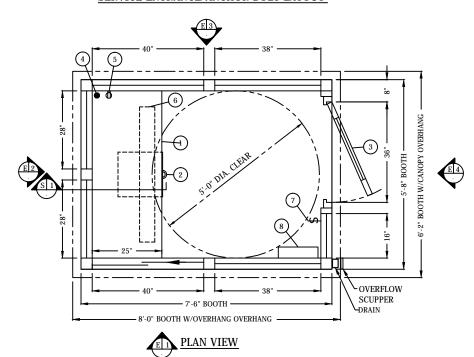

4" INSULATION ·

THIS DRAWING IS FOR REFERENCE PURPOSES ONLY. PAR-KUT BUILDINGS MUST BE SECURELY ANCHORED IN PLACE AND ELECTRICAL SYSTEM MUST BE PROPERLY <u>GROUNDED</u>. ADEQUATE SIZED ANCHOR BOLTS SHALL BE USED. THE SIZE AND DEPTH OF THE ANCHORS SHOULD BE OF SUFFICIENT DESIGN TO WITHSTAND THE HIGHEST RECORDED WIND SPEEDS/SEISMIC DESIGN CATEGORY IN THE AREA OF INSTALLATION. CONSULT A PROFESSIONAL ENGINEER FAMILIAR WITH THE WEATHER CONDITIONS IN THE AREA.


- a. SLOT IN FLOOR FOR ELECTRICAL SERVICE ENTRANCE TO C.B. PANEL.
- 2" X 2" X $\frac{1}{4}$ " (MIN) STEEL ANCHOR CLIP WITH A $\frac{3}{4}$ " ANCHOR BOLT HOLE, b. 4-REQ'D. ONE EACH CORNER. ANCHOR BUILDING AFTER FINAL LOCATION. ANCHOR BOLTS NOT INCLUDED. OUTER EDGE OF BUILDING.
- SUGGESTED MINIMUM FOUNDATION/SLAB.

GENERAL SITE INSTALLED ITEMS PROVIDED BY OTHERS


- PROVIDE 120V/240V, SINGLE PHASE, 3-WIRE SERVICE WITH GROUND. CONCRETE FOUNDATION/SLAB MINIMUM 6" DEEP, 3,000 PSI MINIMUM (28 DAY ACI 318). THE FOUNDATION/SLAB SHOULD BE A MINIMUM OF 24" WIDER THAN THE BUILDING FOOT PRINT DIMENSIONS. THIS IS TO PROVIDE A 12" CONCRETE BORDER ON EACH SIDE OF THE BUILDING.
- ADEQUATE SIZE DRILLED ANCHOR BOLTS. SUGGESTED SIZE: 5/8" X 4/2" 3. POWER FASTENERS "POWER STUD" CATALOG #7332.
- COUNTER 25" DEEP PAINTED GALVANIZED STEEL MOUNTED 32" ABOVE FLOOR.
- PAINTED STORAGE DRAWER.
- DOOR 36" WIDE, SWINGING STEEL WITH WEATHER-STRIPPING, BALL BEARING BUTTS, SAFETY GLAZING, HYDRAULIC CLOSER, LEVER HANDLE LOCKSET, AND HARDWARE.
- 2" DIAMETER HOLE IN COUNTER FOR DROP CORDS. DUPLEX OUTLET MOUNTED BELOW COUNTER.
- CODE COMPLIANT LIGHT FIXTURE.
- SWITCH FOR INTERIOR LIGHT.
- CIRCUIT BREAKER PANEL 12 SPACE. 120/240V. 1 Ø-3 WIRE WITH GROUND BAR. 100 AMP MAIN BREAKER, AND ALL BRANCH BREAKERS FOR FACTORY INSTALLED DEVICES PROVIDED.
- PAR-KUT BOOTHS ARE OF SINGLE UNIT WELDED STEEL CONSTRUCTION, NOTE: FACTORY ASSEMBLED AND DELIVERED SET UP. FAILURE TO SECURELY ANCHOR BOOTH MAY RESULT IN OVERTURNING OF UNIT AND SERIOUS INJURY TO OCCUPANT
- A. GLAZING TEMPERED SAFETY GLAZING SET IN PAINTED STEEL EXTERIOR WINDOW FRAMES WITH REMOVABLE ALUMINUM INTERIOR GLAZING STOPS.
- B. PAINT FINISH SHALL BE SINGLE COLOR OF CHOICE. IMRON POLYURETHANE HIGH GLOSS INDUSTRIAL COATING. SHALL BE APPLIED TO ALL EXPOSED METAL SURFACES. THIS EXCLUDES ROOF SURFACE, AND ANY STAINLESS STEEL COMPONENTS (IF USED).
- C. ELECTRICAL ALL WIRING BY PAR-KUT TO BE #12(MIN) STRANDED COPPER, THHN ENCLOSED IN $\frac{1}{2}$ "(MIN) E.M.T. PER NATIONAL ELECTRIC CODE. ALL ELECTRICAL EQUIPMENT WILL BE LISTED BY U.L. OR EQUIVALENT RECOGNIZED NATIONAL
- TESTING LABORATORY. ALL WIRING TO TERMINATE AT C.B. PANEL . ALL CIRCUITS HAVE GREEN GROUND WIRE.
- BOOTH WILL HAVE A 3" CANOPY OVERHANG ON ALL SIDES.
- LIFTING RING(S) ARE PROVIDED ON ROOF. NO ON SITE WORK BY PAR-KUT.
- ACTUAL LOCATION OF ELECTRICAL DEVICES MAY VARY DUE TO INSTALLATION CONSTRAINTS, SHIPPING RESTRICTIONS, OR PROPER PLACEMENT TO SATISFY APPLICABLE CODES.

PAINTED STORAGE DRAWER DUPLEX OUTLET 18GA. GALV. STEEL INNER PANEL 4" INSULATION · 14GA. GALV. STEEL OUTER PANEL 12GA. GALV. 4-WAY DIAMOND PLATE STEEL FLOOR 2" X 2" GALV. STEEL TUBE BASE



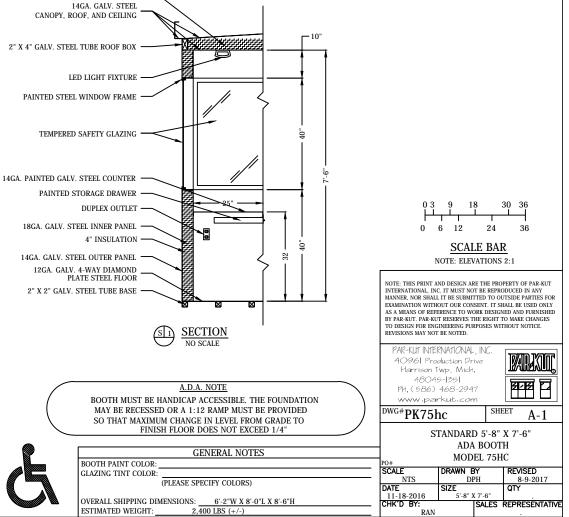

ESTIMATED WEIGHT:



FIELD DRILLED ANCHOR BOLT DETAIL NO SCALE